

# BM2 BIEMMEDUE

heating, cleaning and drying



## MAX

IDROPULTRICI PROFESSIONALI AD ACQUA FREDDA  
PROFESSIONAL COLD WATER HIGH PRESSURE CLEANERS



## MAX - IDROPULITRICI PROFESSIONALI AD ACQUA FREDDA PROFESSIONAL COLD WATER HIGH PRESSURE CLEANERS

- Pompe a bielle con pistoni in ceramica e testata in ottone
- Motori a 1450 rpm
- Motore ad alto rendimento
- Sistema di protezione dell'accoppiamento alberi motore-pompa (SJ)
- Protezione termica del motore
- Total stop ritardato (TSD)
- Struttura verniciata con copertura in acciaio inox AISI 430
- 2 ruote da 300 mm + 1 ruota da 125 mm
- Freno di stazionamento a pedale
- Triplex plunger pump with ceramic pistons and brass head
- 1450 rpm motor
- High efficiency motor with double thermal protection
- Motor/pump coupling protection with special lubricant retention system (SJ)
- Delayed total stop (TSD)
- Powder coated Metal Frame with AISI 430 cover
- Heavy duty 300 mm wheels and 1 for 125 mm
- Parking brake pedal


### ACCESSORI IN DOTAZIONE / SUPPLIED ACCESSORIES

N°	MOD.	COD.	DESCRIZIONE
1	Tutti - All	01AC418	Idropistola con Semilancia (in M22 out M22) Spray gun with Semilance (in M22 out M22)
2	Tutti - All	01AC319	Lancia INOX l=50 cm (in M22 out 1/4"F) Stainless steel lance l=50 cm (in M22 out 1/4"F)
3	180/18 200/15 160/21	150307 150284 150286	Ugello - Nozzle 1/4" M 2506 Ugello - Nozzle 1/4" M 25045 Ugello - Nozzle 1/4" M 25075
4	Tutti - All	01AC401	Tubo A.P. l=10 m R1 - 5/16" M22 - M22 H.P. hose l=10 m R1 - 5/16" M22 - M22
5	Tutti - All	B.RCVR00170	Portagomma innesto rapido 1/2" - Hose connector
6	Tutti - All	B.RCVR00169	Presca portagomma 3/4" - Threaded tap adaptor

### ACCESSORI A RICHIESTA / ACCESSORIES ON DEMAND

AVVOLGITUBO IN ACCIAIO INOX AISI 304 - L MAX = 20 m STAINLESS STEEL AISI 304 HOSE REEL L MAX = 20 m	KIT UGELLO STURATUBO RETRO NOZZLE KIT	KIT UGELLO ROTANTE TURBO TURBO NOZZLE KIT	KIT SABBATURA SANDBLASTING KIT
 <b>Mod. Tutti - All</b> <b>Cod. 01AC518</b>	 <b>Mod. Tutti - All (tubo - hose l= 15m)</b> <b>Cod. 01AC376</b>	 <b>Mod. Tutti - All (lancia - lance l= 70cm)</b> <b>Cod. 01AC514</b>	 <b>Mod. 200/15 (045)</b> <b>Cod. 01AC475*</b>
	<b>Mod. 200/15 ugello - nozzle (05)</b> <b>Cod. 01AC403</b>	<b>Mod. 200/15 ugello - nozzle (045)</b> <b>Cod. 01AC295</b>	<b>Mod. 180/18 - 160/21 (06)</b> <b>Cod. 01AC479*</b>
	<b>Mod. 180/18 ugello - nozzle (065)</b> <b>Cod. 01AC404</b>	<b>Mod. 180/18 ugello - nozzle (065)</b> <b>Cod. 01AC297</b>	<b>Mod. Tutti/All</b> Ugello sabbia - sand nozzle (ricambio - spare part) <b>Cod. 01AC480</b>
	<b>Mod. 160/21 ugello - nozzle (07)</b> <b>Cod. 01AC288</b>	<b>Mod. 160/21 ugello - nozzle (07)</b> <b>Cod. 01AC298</b>	

\* Ugello incluso nel kit - Nozzle included

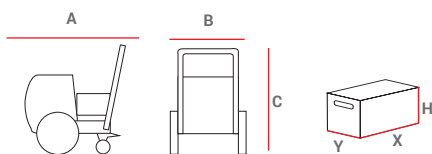

PESI E DIMENSIONI MACCHINA WEIGHTS AND DIMENSIONS MACHINE					IMBALLO PACKAGING			
MOD	A	B	C	Netto/Net	X	Y	H	Lordo/Gross
	[mm]	[mm]	[mm]	[kg]	[mm]	[mm]	[mm]	[kg]
MAX 180/18-200/15	730	460	770	71	800	400	500	79
MAX 160/21	730	460	770	74	800	400	500	83

	180/18	200/15	160/21
codice - code	● 01PF108	● 01PF109	● 01PF110
pressione max. - max. pressure	[ bar ] 180 [ MPa - psi ] 18-2.600	200 20-2.900	160 16-2.300
portata max. - max. flow rate	[ lt/h ] 1.080	900	1.260
pompa - pump	IP47	IP47	IP47
sistema di arresto - stop system	TSD	TSD	TSD
rotazione pompa - pump speed	[ rpm ] 1.450	1.450	1.450
potenza assorbita max - max. absorbed power	[ Kw ] 7,2	7,2	7,2
alimentazione - supply voltage	[ V - ph - Hz ] 400-3-50	400-3-50	400-3-50
massima temp. aliment - max. inlet temp.	[ °c ] 40	40	40
quantità per pallet - pallet quantities	[ pz - pcs ] 9	9	9